




3-Point Hitch Kit Installation Instructions

Model 50964

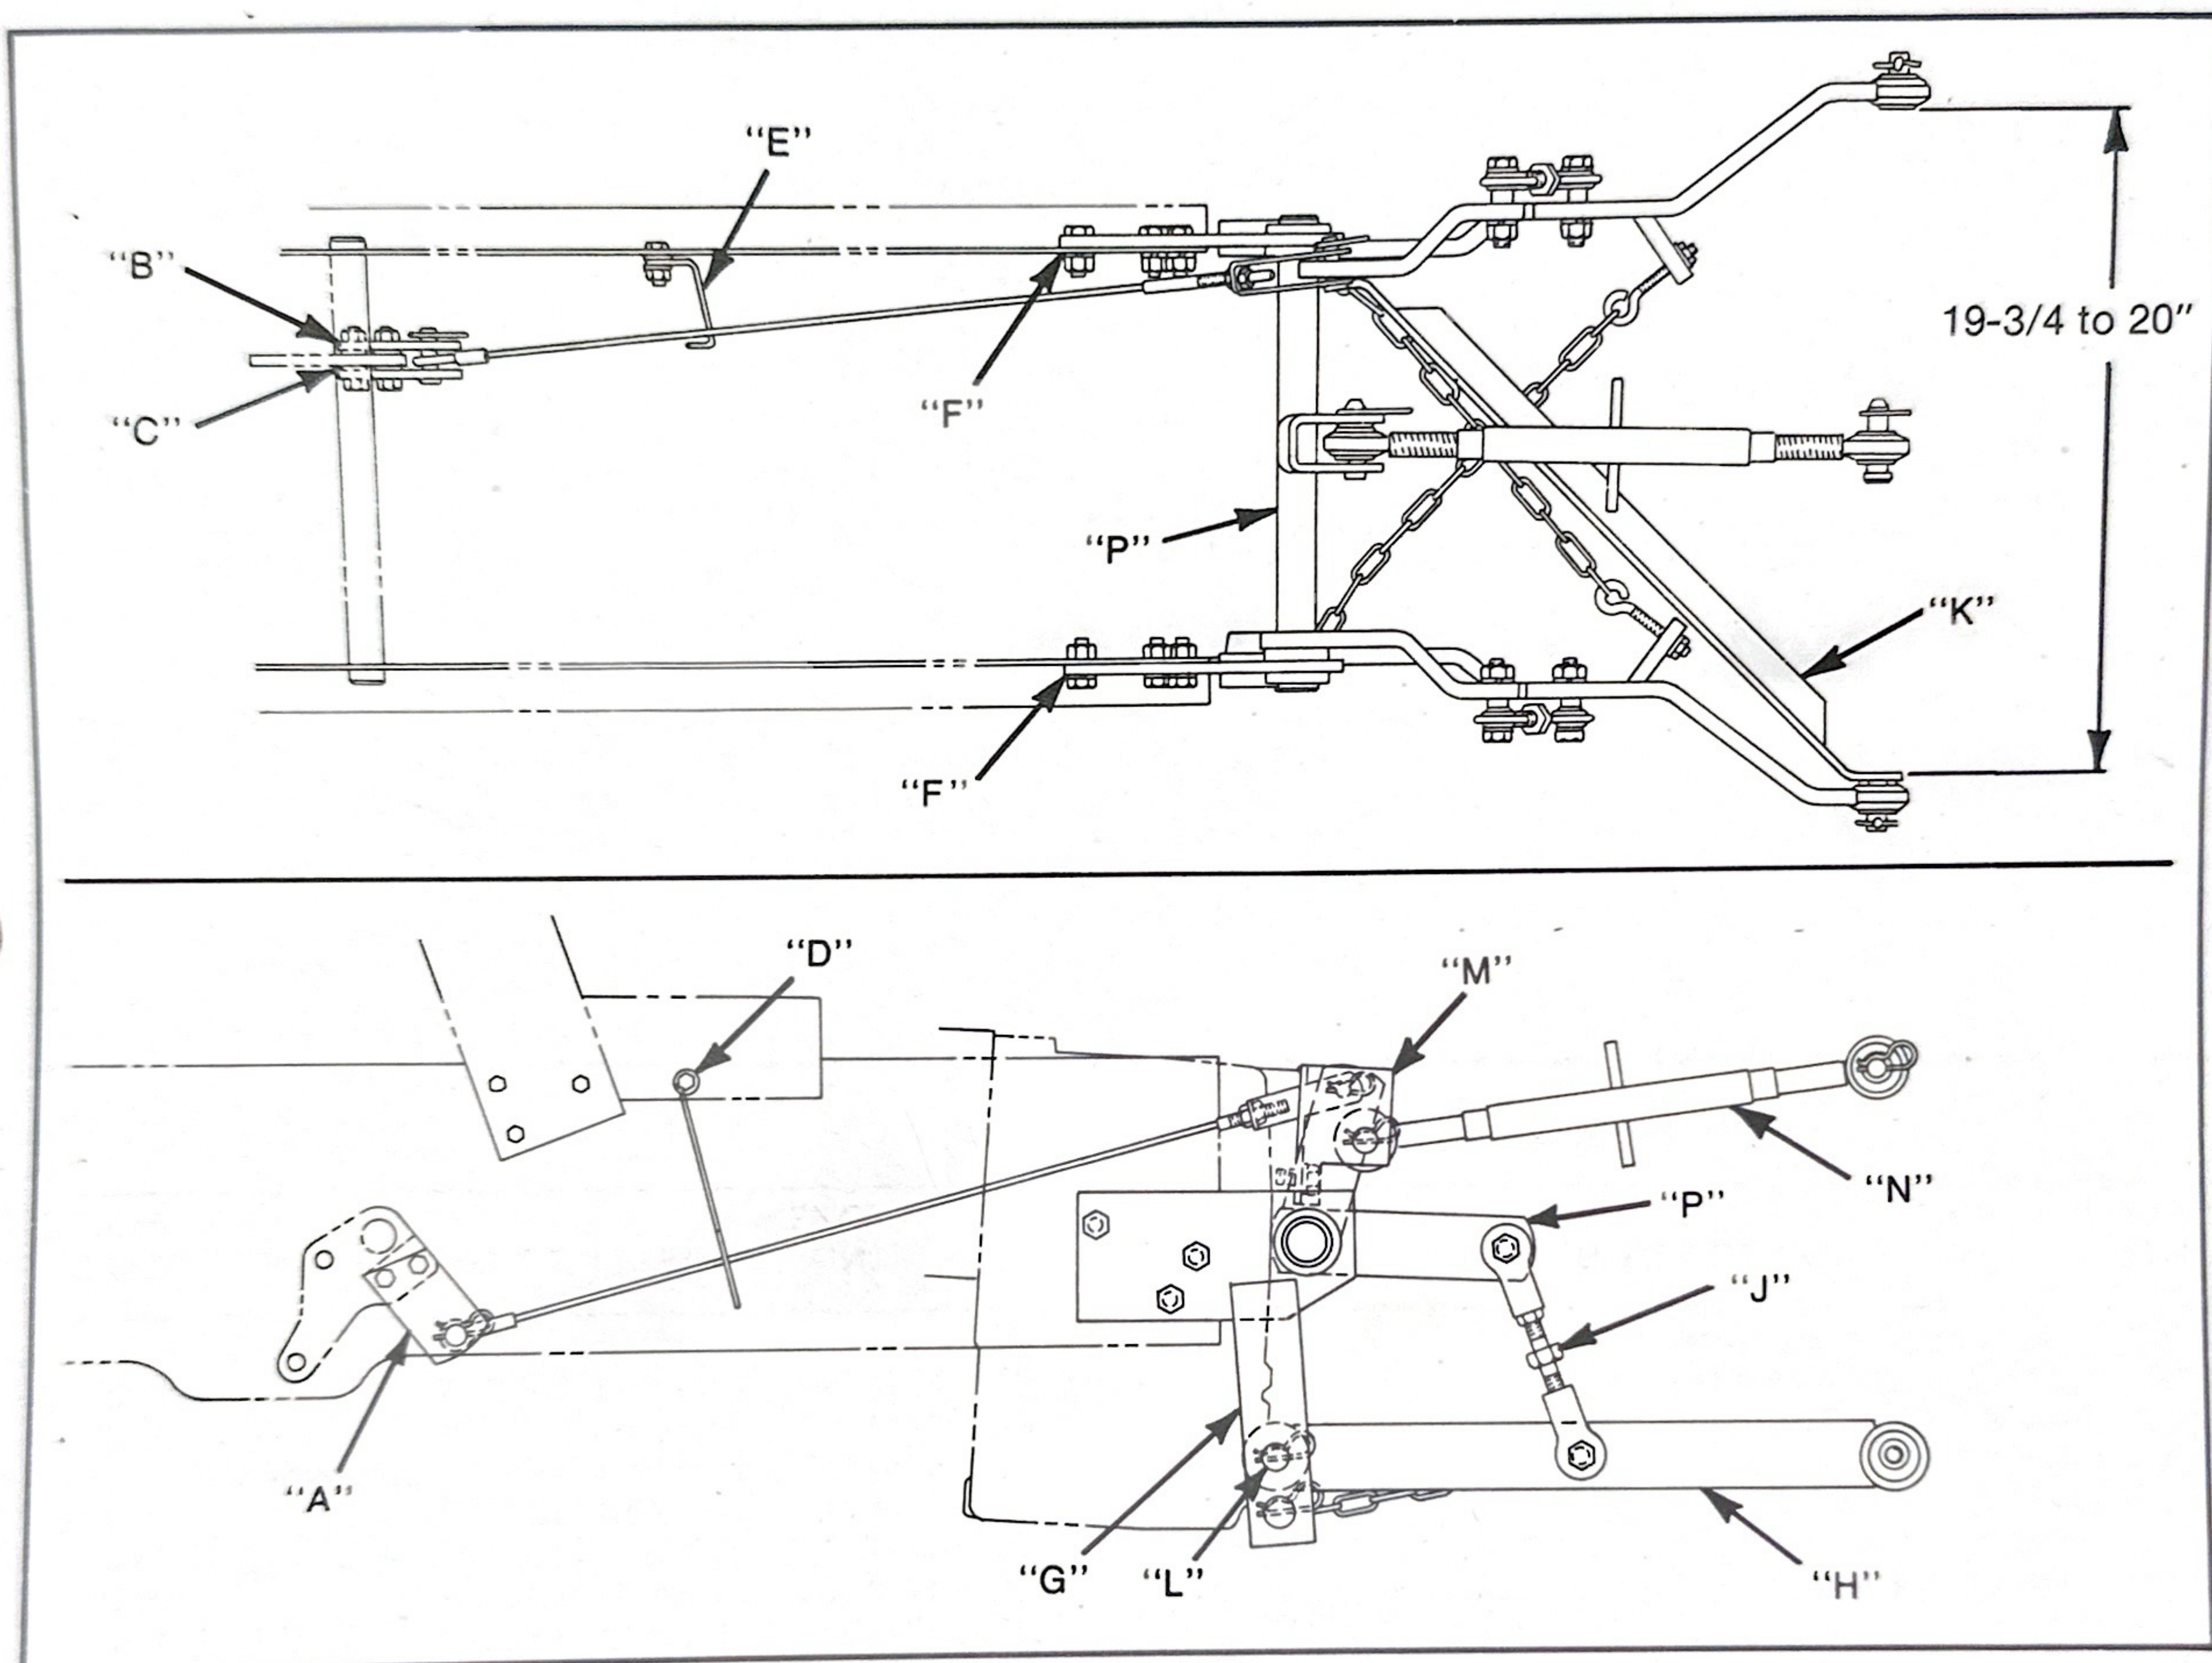

1. Locate (2) lift arms (A) and secure to tractor lift arm using (2) 3/8-16 x 1-1/2 hex screws, (2) lock washers and (4) 3/8 flat washers. Place lift arm (B) with welded nuts to outside and flat washers (C) between arms and tractor lift arm.
2. Remove hardware (D) at tunnel mounting hole and discard. Secure cable hook (E) to frame using a 3/8 flat washer, cable hook, another flat washer, and lock nut on the inside of frame. Replace the exist-

ing screw with a 3/8-16 x 1" flange screw. Position the cable hook as shown.

3. Locate the two large frame hitch arm assemblies. Place pivot shaft assembly (P) into bearings of hitch arms. Hitch arms are to be installed with straight arm (G) to the outside.


Secure the two hitch assemblies to the outside of the frame using (60) 1/2-13 x 1-1/4 hex screws, lock washers and hex nuts. Nuts should

be to the inside. Place lock washers (F) on the outside on the L.H. side and inside on the R.H. side.

4. Locate the lift cable and secure it to the front lift arm using (1) 1/2 x 1-7/16 clevis pin and spring pin.

Secure to rear with a 1/2 x 1-1/4 clevis pin and spring pin. Make sure cable is within hook (E).

5. Secure the (2) lower links (H) between hitch arms (G) using a 5/8 x 2-3/4 clevis pin and spring pin.

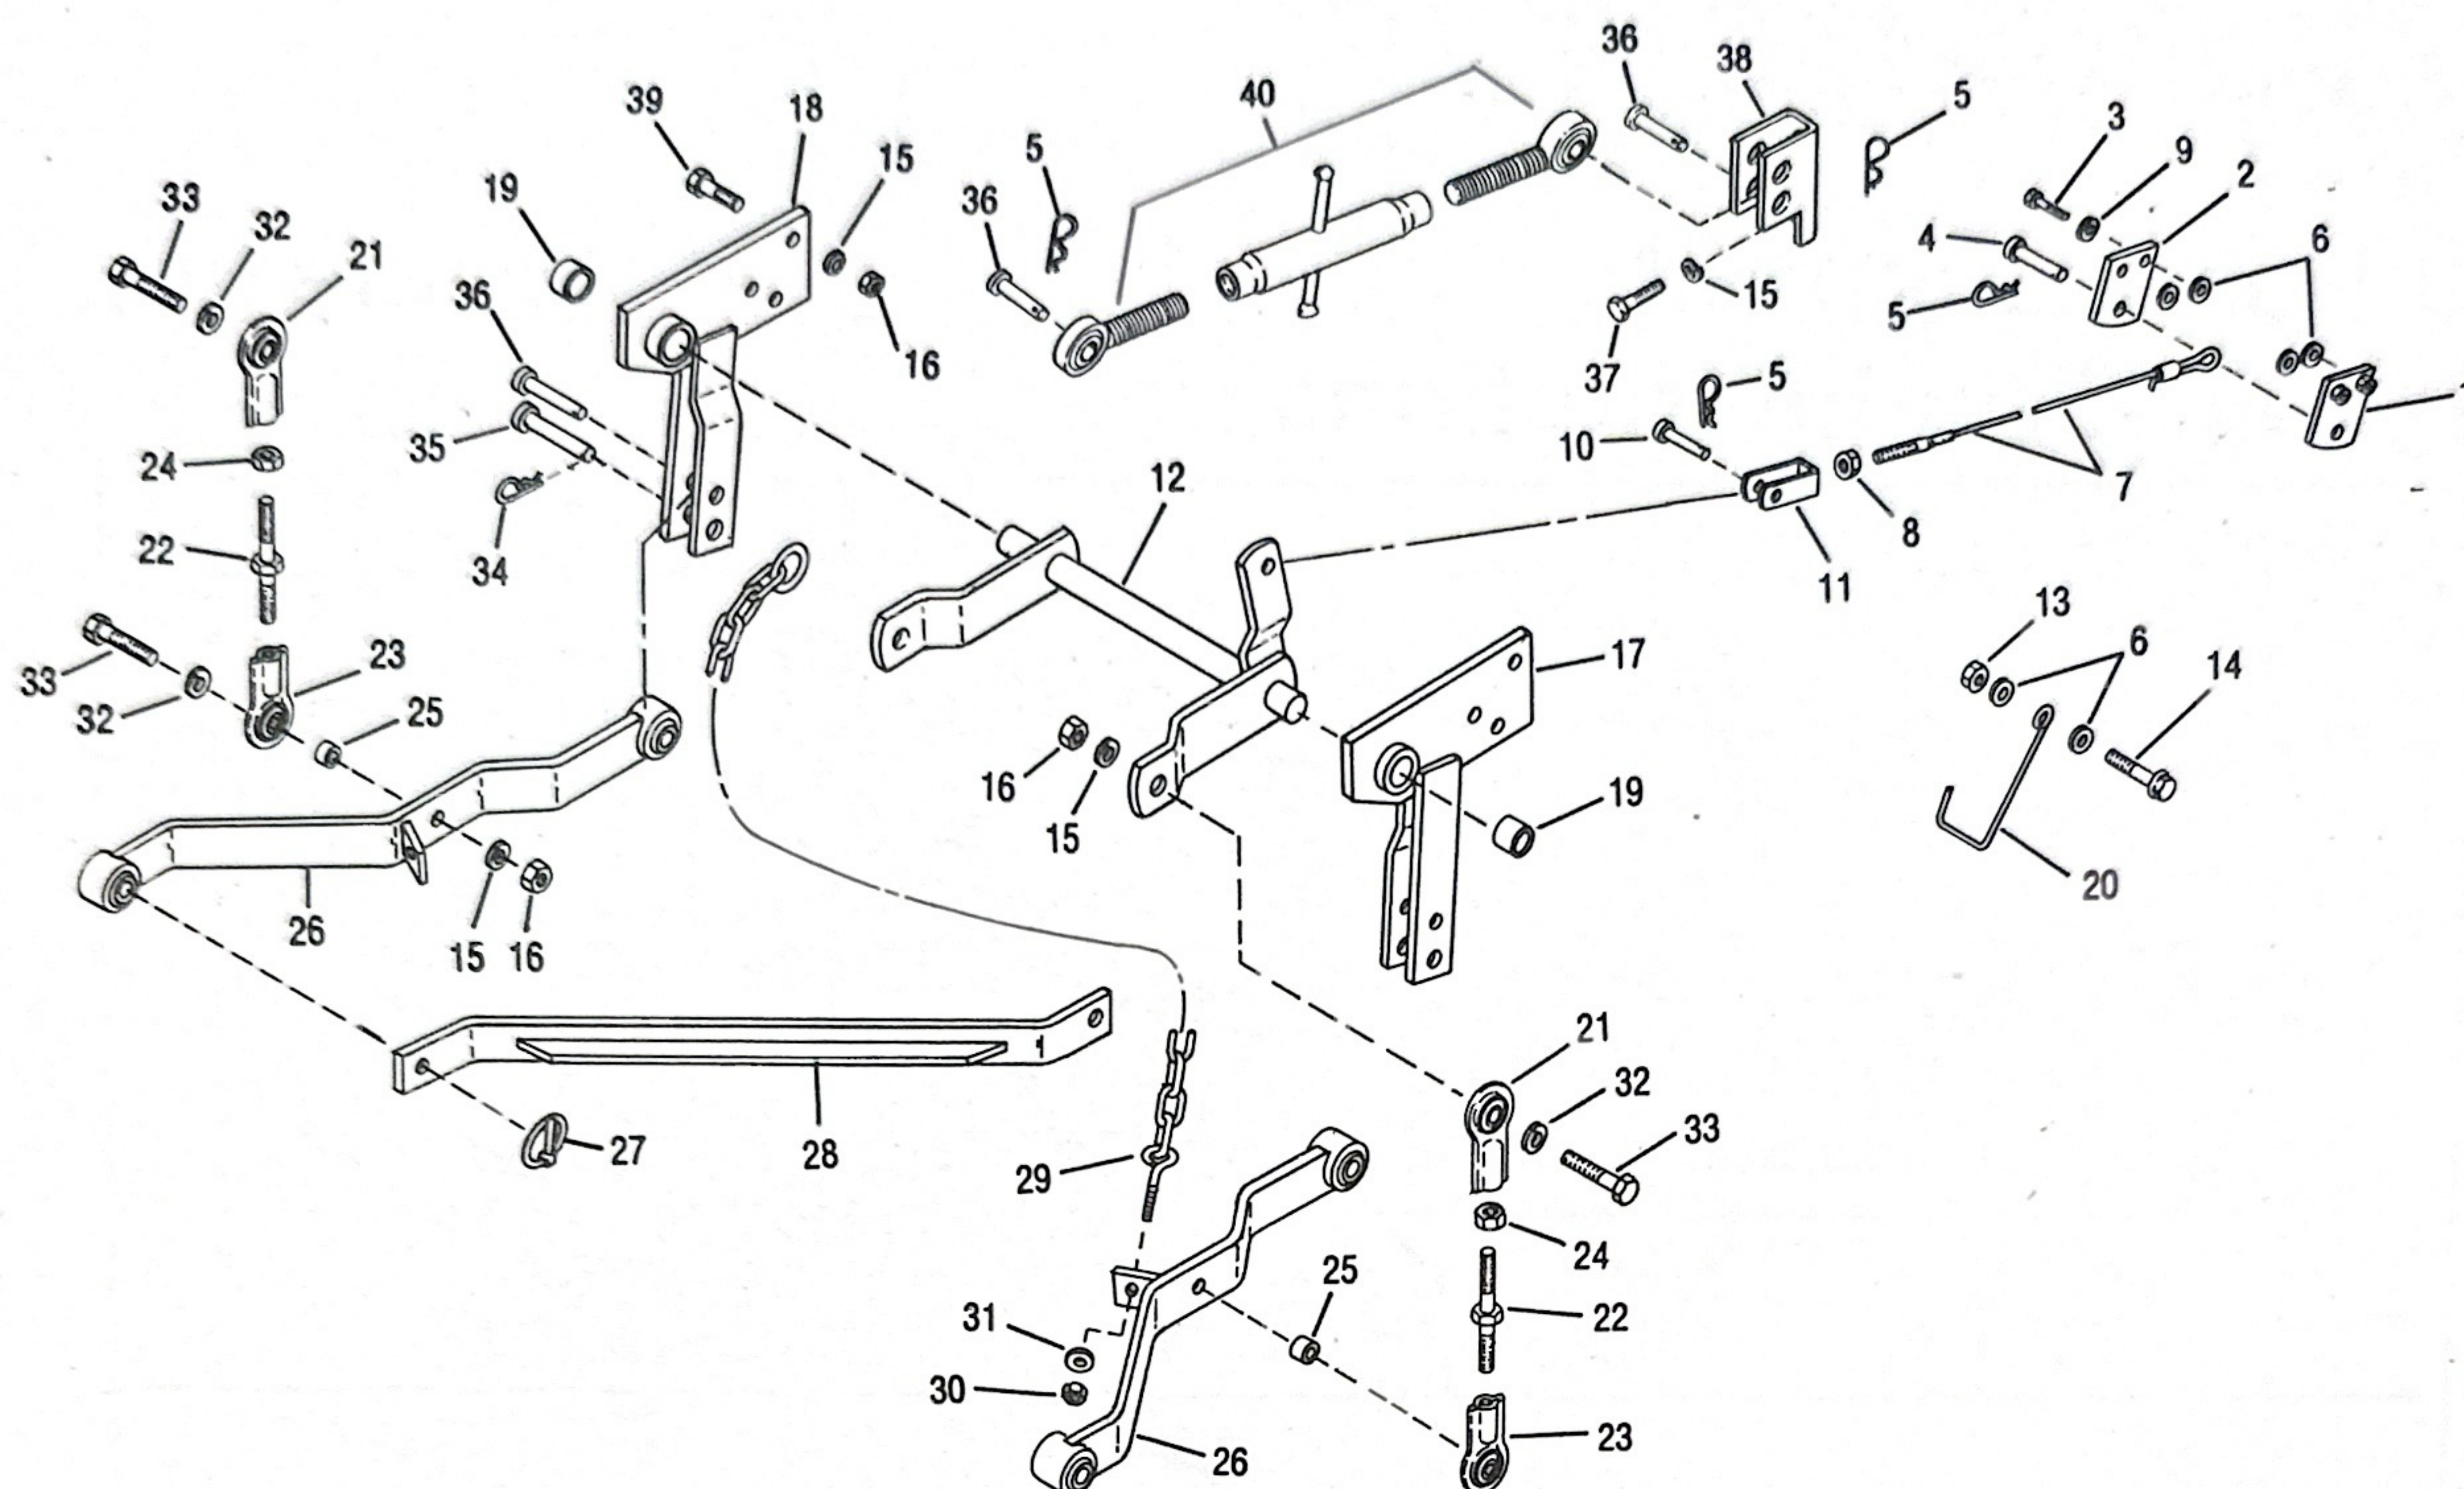

REF. NO.	PART NO.	DESCRIPTION	NO. REQ'D
1	1751171	Lift Arm Ass'y	1
2	1744937	Lift Arm	1
3 •	1100047	Hex Screw 3/8-16 x 1-1/2	2
4	1724632	Clevis Pin 1/2 x 1-7/16	1
5	1723478	Hair Pin	6
6	1708755	Flat Washer 3/8	6
7	1751149	Lift Cable	1
8	1186259	Jam Nut 3/8-16	1
9 •	1100243	Lock Washer 3/8	2
10	1730851	Clevis Pin 1/2 x 1-1/4	1
11	1734192	Cable Yoke Ass'y	1
12	1751160	Pivot Shaft Ass'y	1
13 •	1110108	Lock Nut 3/8-16	1
14 •	1186347	Flange Screw 3/8-16 x 1	1
15 •	1100245	Lock Washer 1/2	12
16 •	1186233	Hex Nut 1/2-13	10
17	1751156	Hitch Ass'y R.H.	1
18	1751155	Hitch Ass'y L.H.	1
19	1751150	Bearing	2
20	1731956	Cable Hook	1

REF. NO.	PART NO.	DESCRIPTION	NO. REQ'D
21	1725754	Rod End, 1/2-20 (R.H. Thd) ...	2
22	1751167	Stud Ass'y	2
23	1751168	Rod End, 1/2-20 (L.H. Thd) ...	2
24	1186247	Jam Nut 1/2-20	2
25	1747523	Spacer	4
26	1751165	Lower Link Ass'y	2
27	1719349	Retaining Pin	2
28	1751162	Sway Bar Ass'y	1
29	1725434	Chain Ass'y	2
30	1732499	Hex Lock Nut 5/16-18	2
31	1803327	Flat Washer 5/16	2
32	1707397	Flat Washer	4
33 •	1100075	Hex Screw 1/2-13 x 2-1/4	4
34	1185590	Hitch Pin	2
35	1718773	Clevis Pin 3/4 x 2-3/4	2
36	1718772	Clevis Pin 5/8 x 2-3/4	4
37 •	1100054	Hex Screw 1/2-13 x 1	1
38	1731553	Hitch Bracket	4
39 •	1100055	Hex Screw 1/2-13 x 1-1/4	6
40	1751169	Upper Link Ass'y	1