



REAR ENGINE RIDER STAND KIT

MODEL 6957

INSTALLATION

Locate right hand and left hand mounting bracket assemblies (A).

Position as shown and secure using (4) 3/8-16 x 3/4 flange screws and flange nuts.


Insert stand (B) into mounting brackets and fasten in place using (2) 1/4-20 x 1-3/4 hex screws and hex nuts.

If not installed, slip rubber crutch tips onto ends of stand.



CAUTION

MAKE SURE HEX SCREW AND HEX NUTS (C) ARE SECURELY FASTENED.

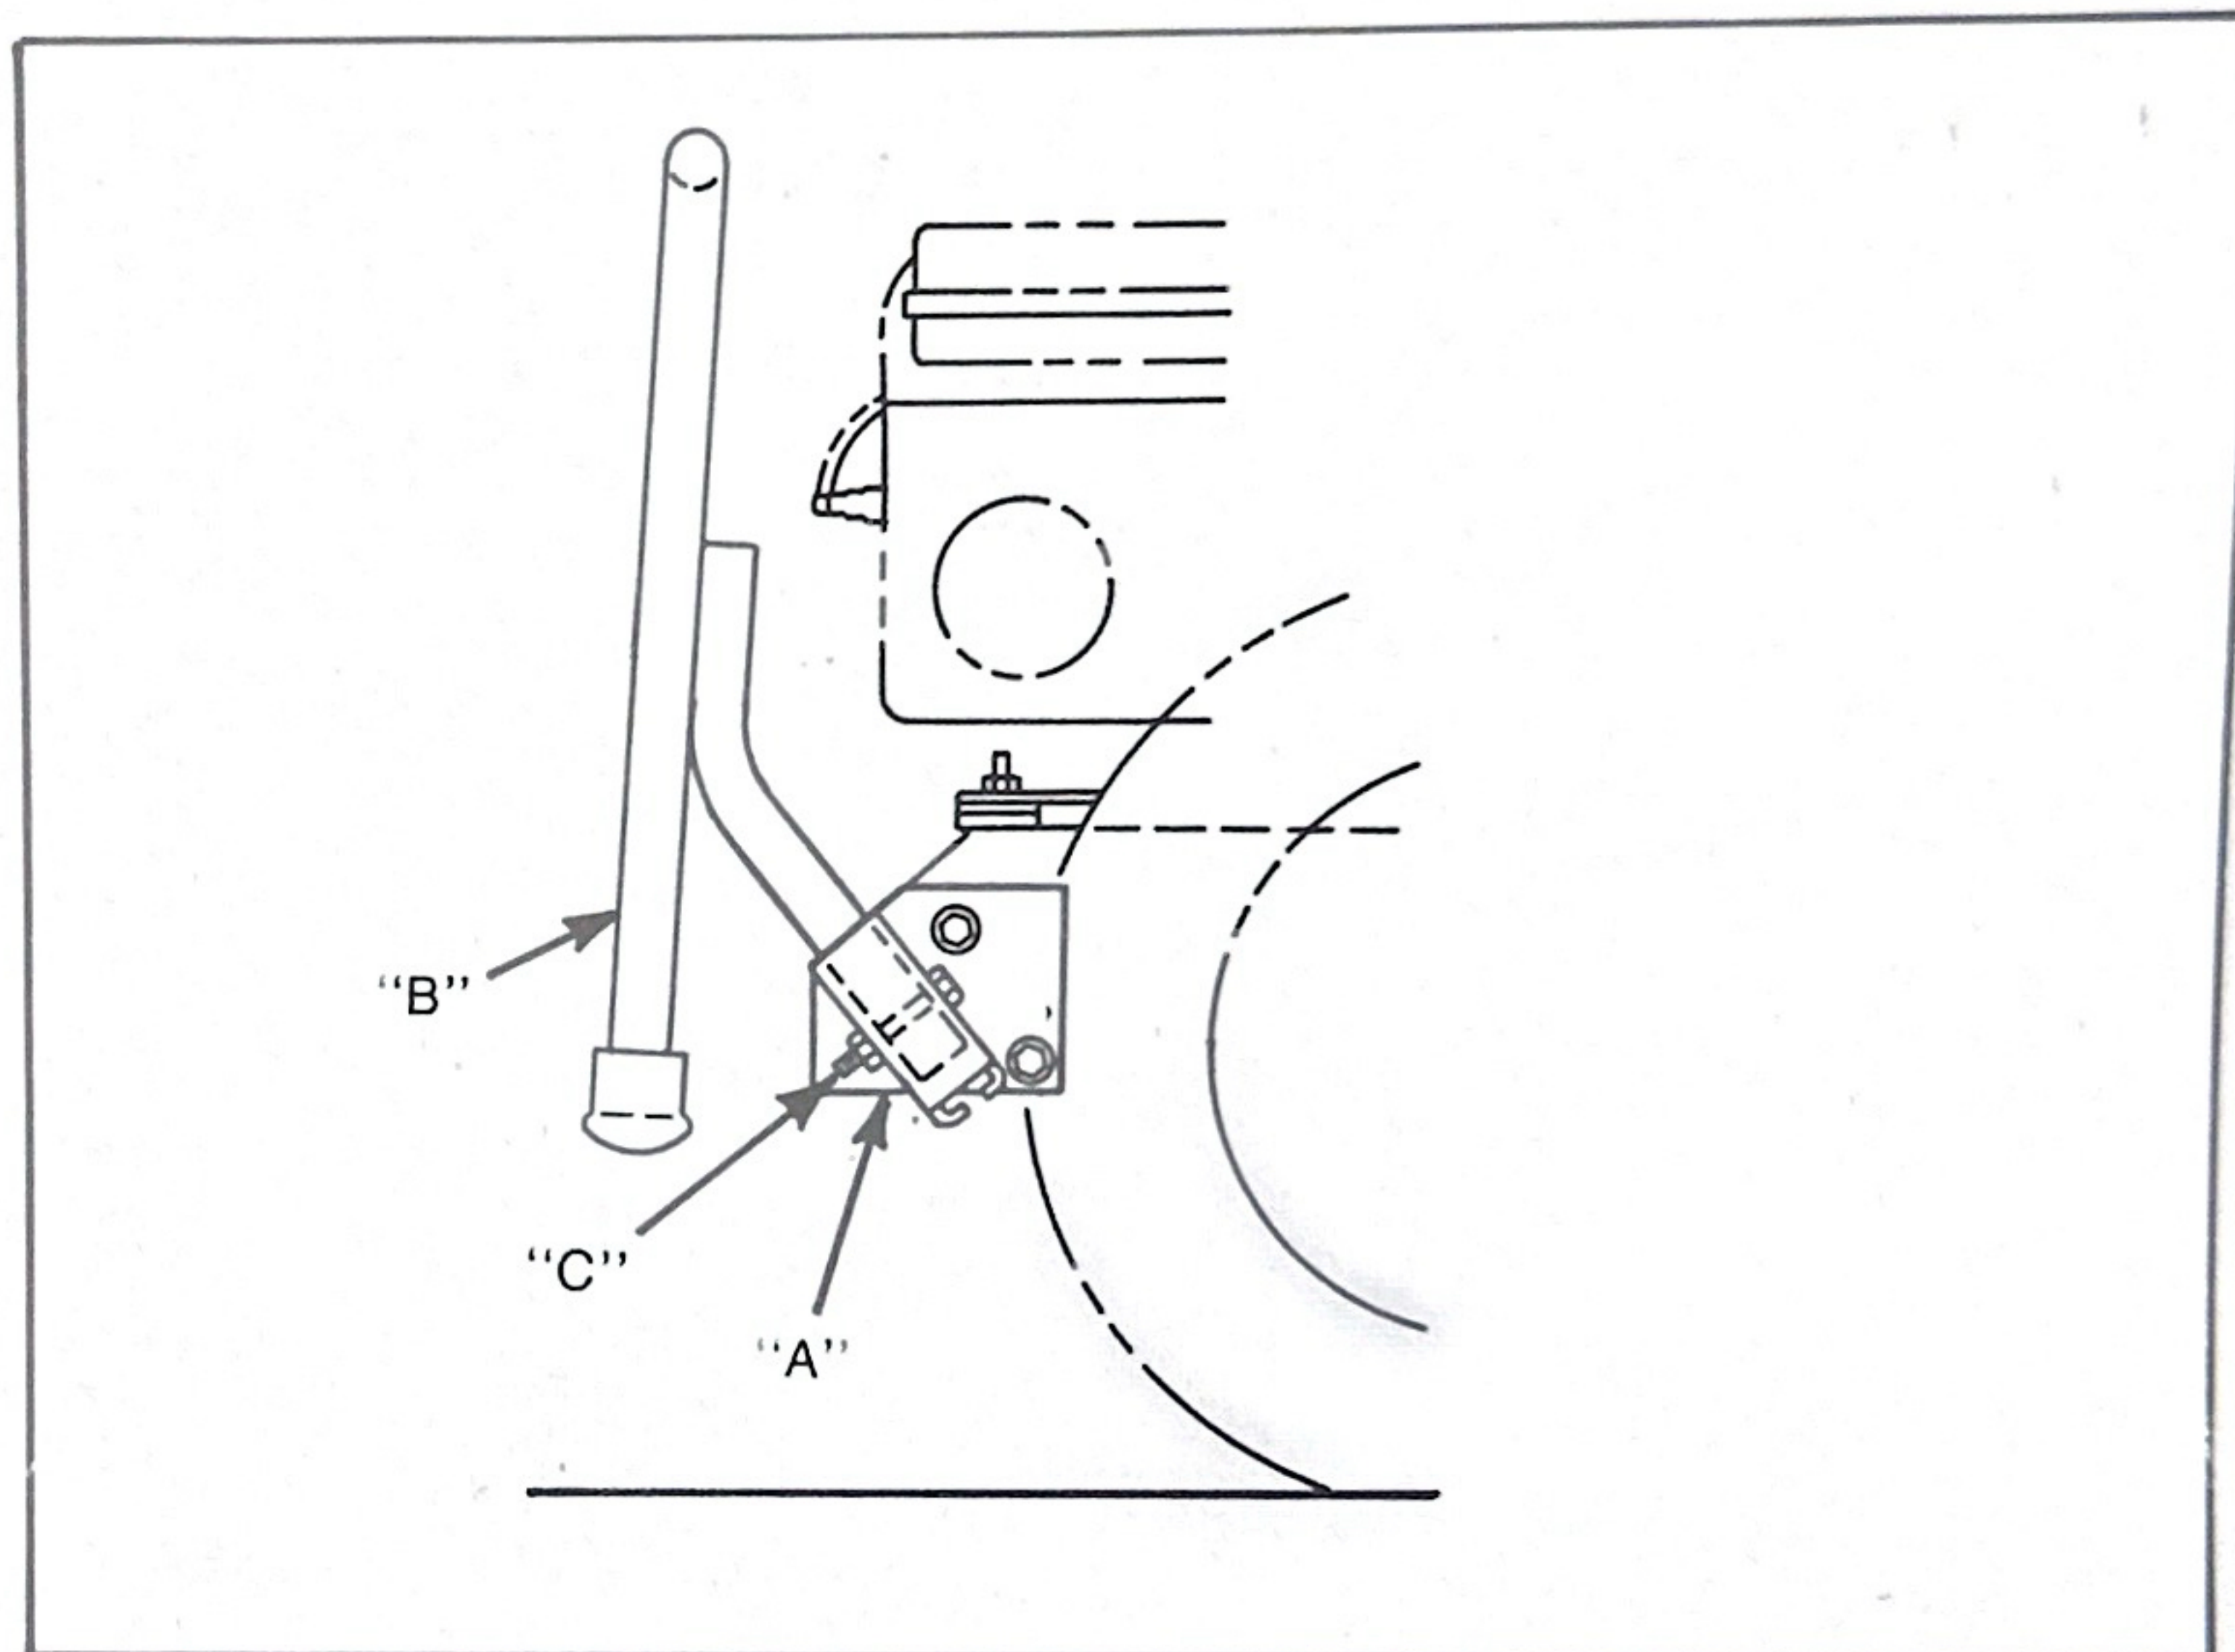

OPERATION

Before tipping the rider on end make sure the battery is removed and the oil and fuel has been drained.

Be careful when raising or lowering your rider.

Always have, at least, two adults maneuver the rider when raising or lowering.

See other storage instructions called out in your Rider Safety and Operation Manual.

PART NO.	DESCRIPTION	NO. REQ'D
1751401	Stand Assembly	1
1747994	R. H. Mounting Bracket	1
1747995	L. H. Mounting Bracket	1
•	Hex Screw 1/4-20 x 1-3/4	2
•	Hex Nut 1/4-20	2
•	Flange Screw 3/8-16 x 3/4	4
•	Flange Nut 3/8-16	4
1752419	Tip	2

•Common Hardware Purchase Locally (Grade 5 where applicable)