

FMC CORPORATION OUTDOOR POWER EQUIPMENT DIVISION OWNER MANUAL WITH PARTS LIST

MODEL 18098

DELUXE SEAT KIT

The Deluxe Seat is completely assembled except for the mounting plate.

To install onto the tractor proceed as follows:

1. Remove original seat assembly from tractor.
2. Remove spring support from the original seat.
3. Position original spring support with pivot shafts, pivot shaft ties and spring onto mounting plate in kit. Secure with two hex capscrews, nuts and lockwashers 3/8-16 x 1". See figures 1 and 2.
4. Position mounting plate and spring assembly over the four 5/16-18 studs on the bottom of the seat adjusting rails. Secure with Hex nut and lockwasher 5/16-18. See figures 1 and 2.

NOTE: Be sure the above assembly is installed with the mounting lugs to the front of the seat.

5. Seat can now be mounted onto the tractor. See figure 3.

The arm rests can be swung up out of the way for mounting the tractor. See figure 4.

The arm rests can be adjusted to three heights, see "A" figure 1. Remove the capscrew securing arm rest to frame. Move the arm rest either up or down as desired and secure with capscrew removed above.

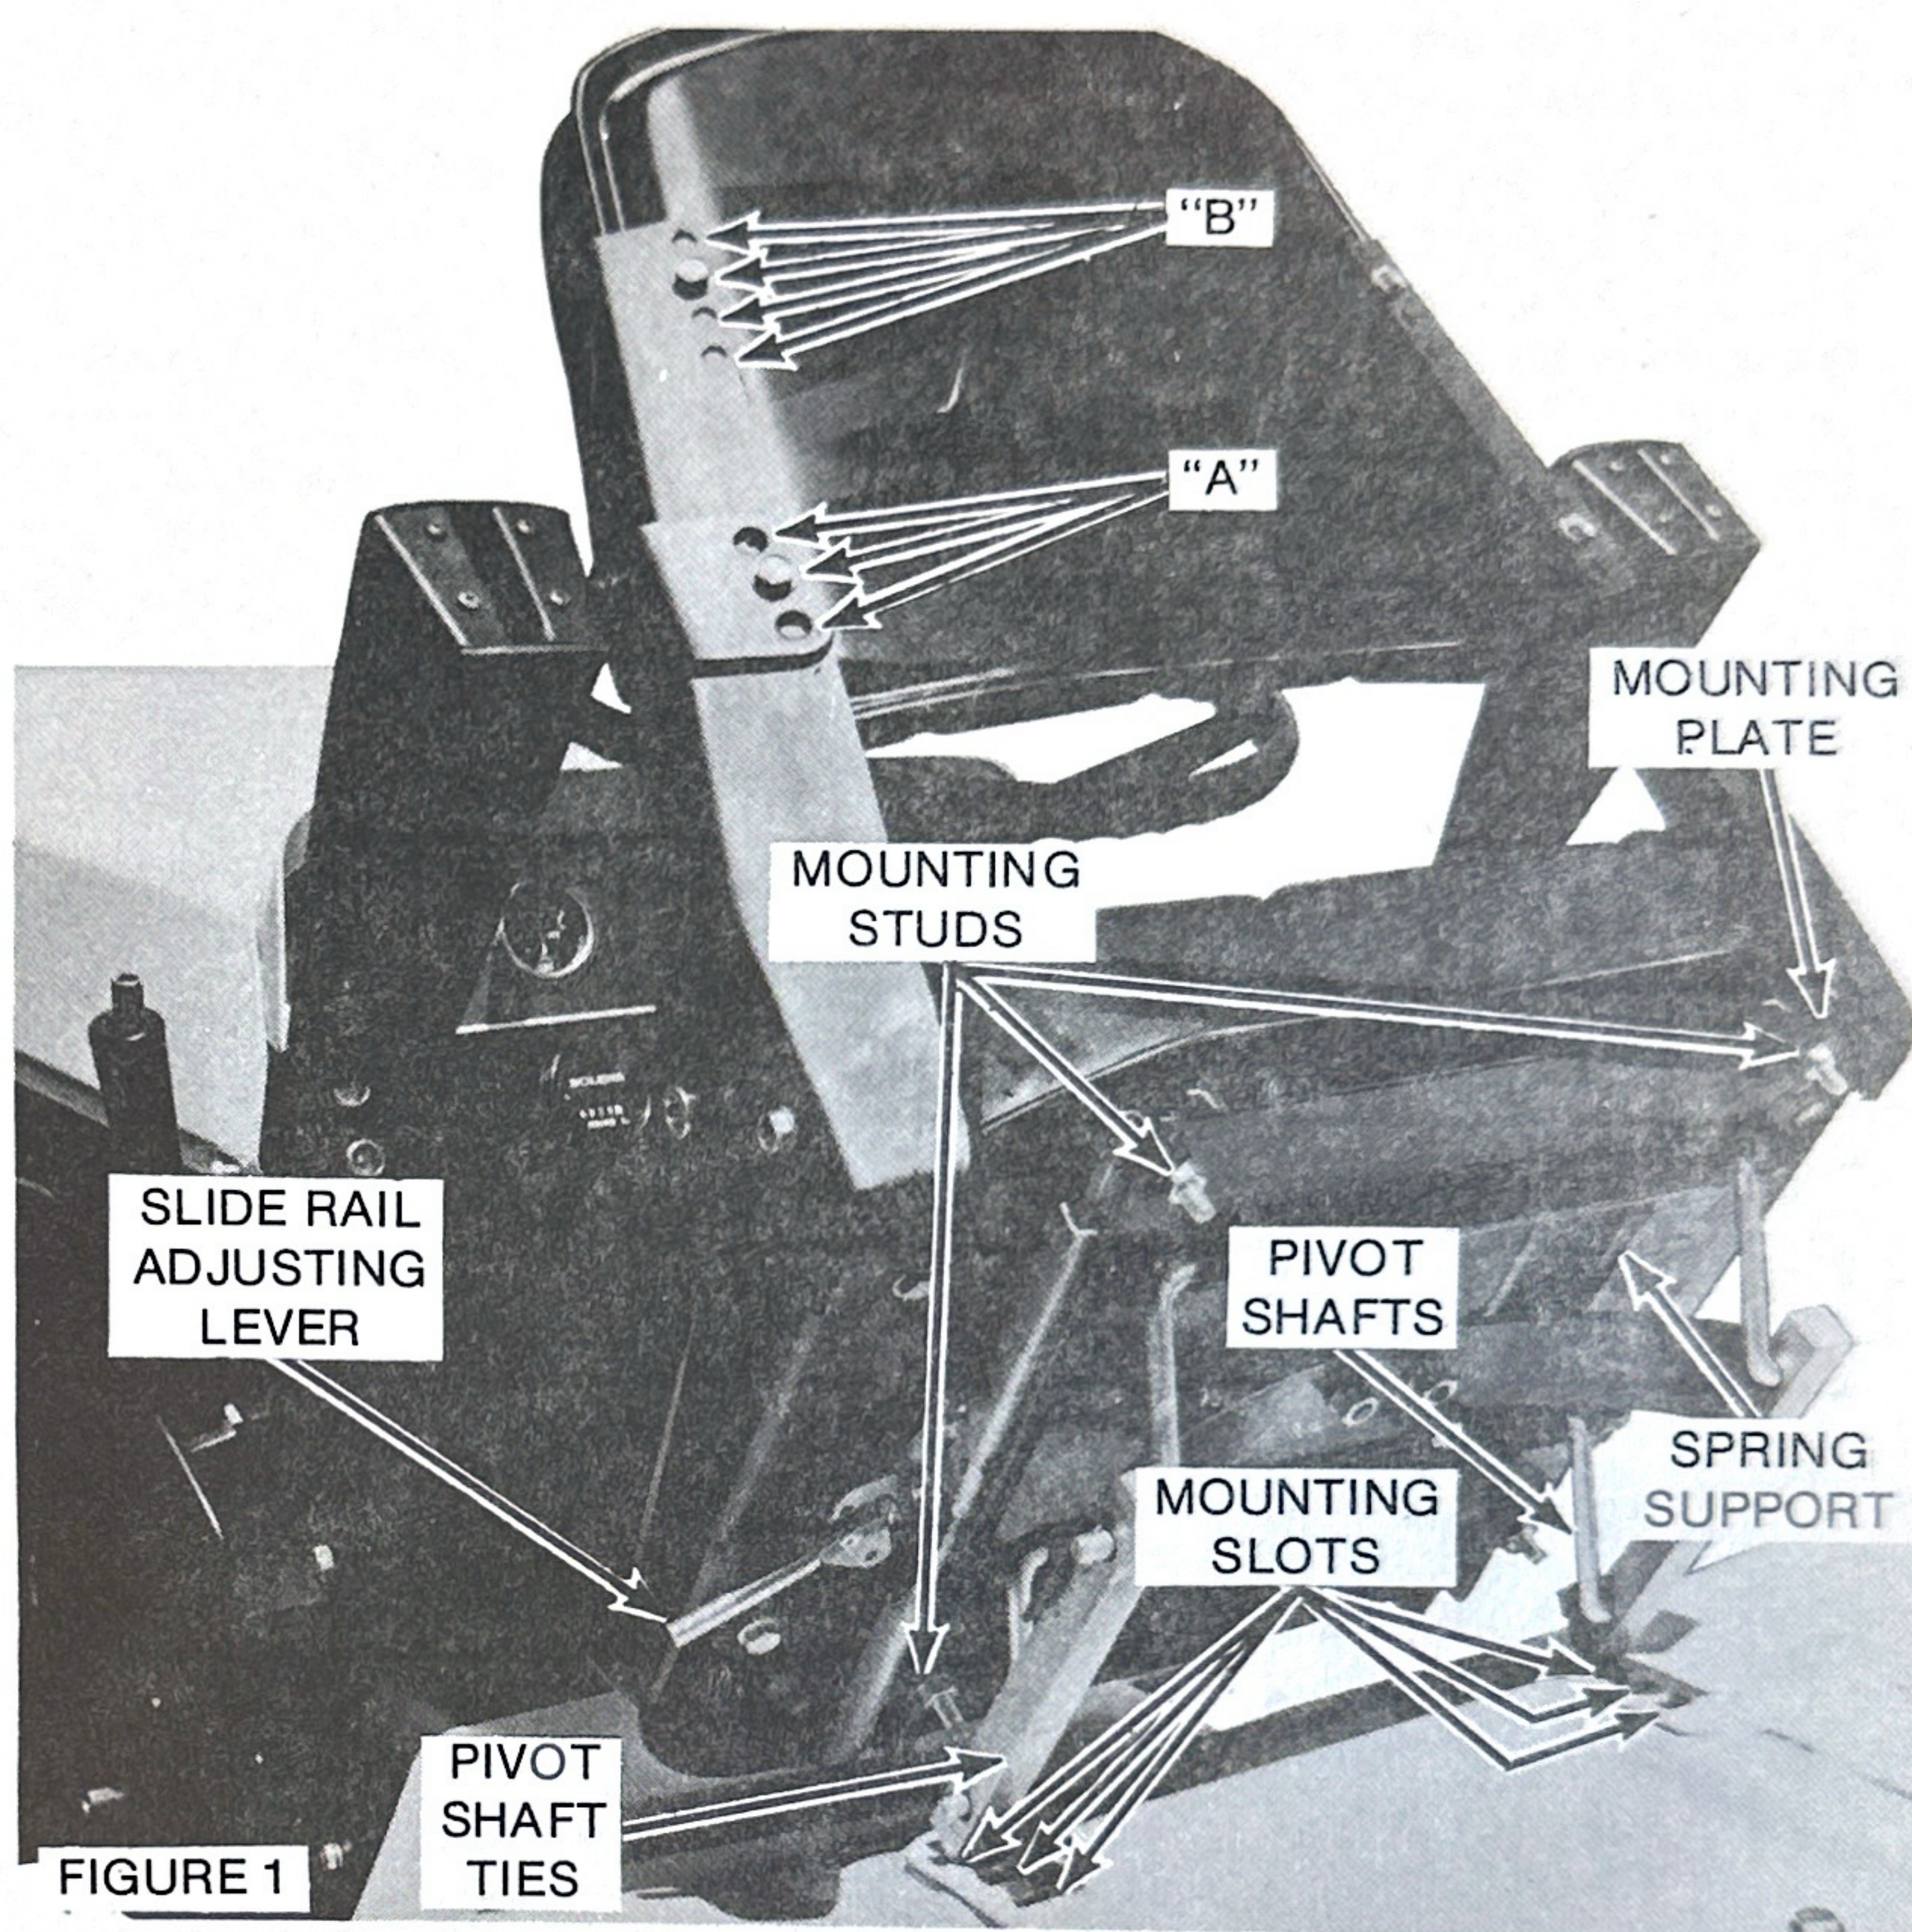


FIGURE 1

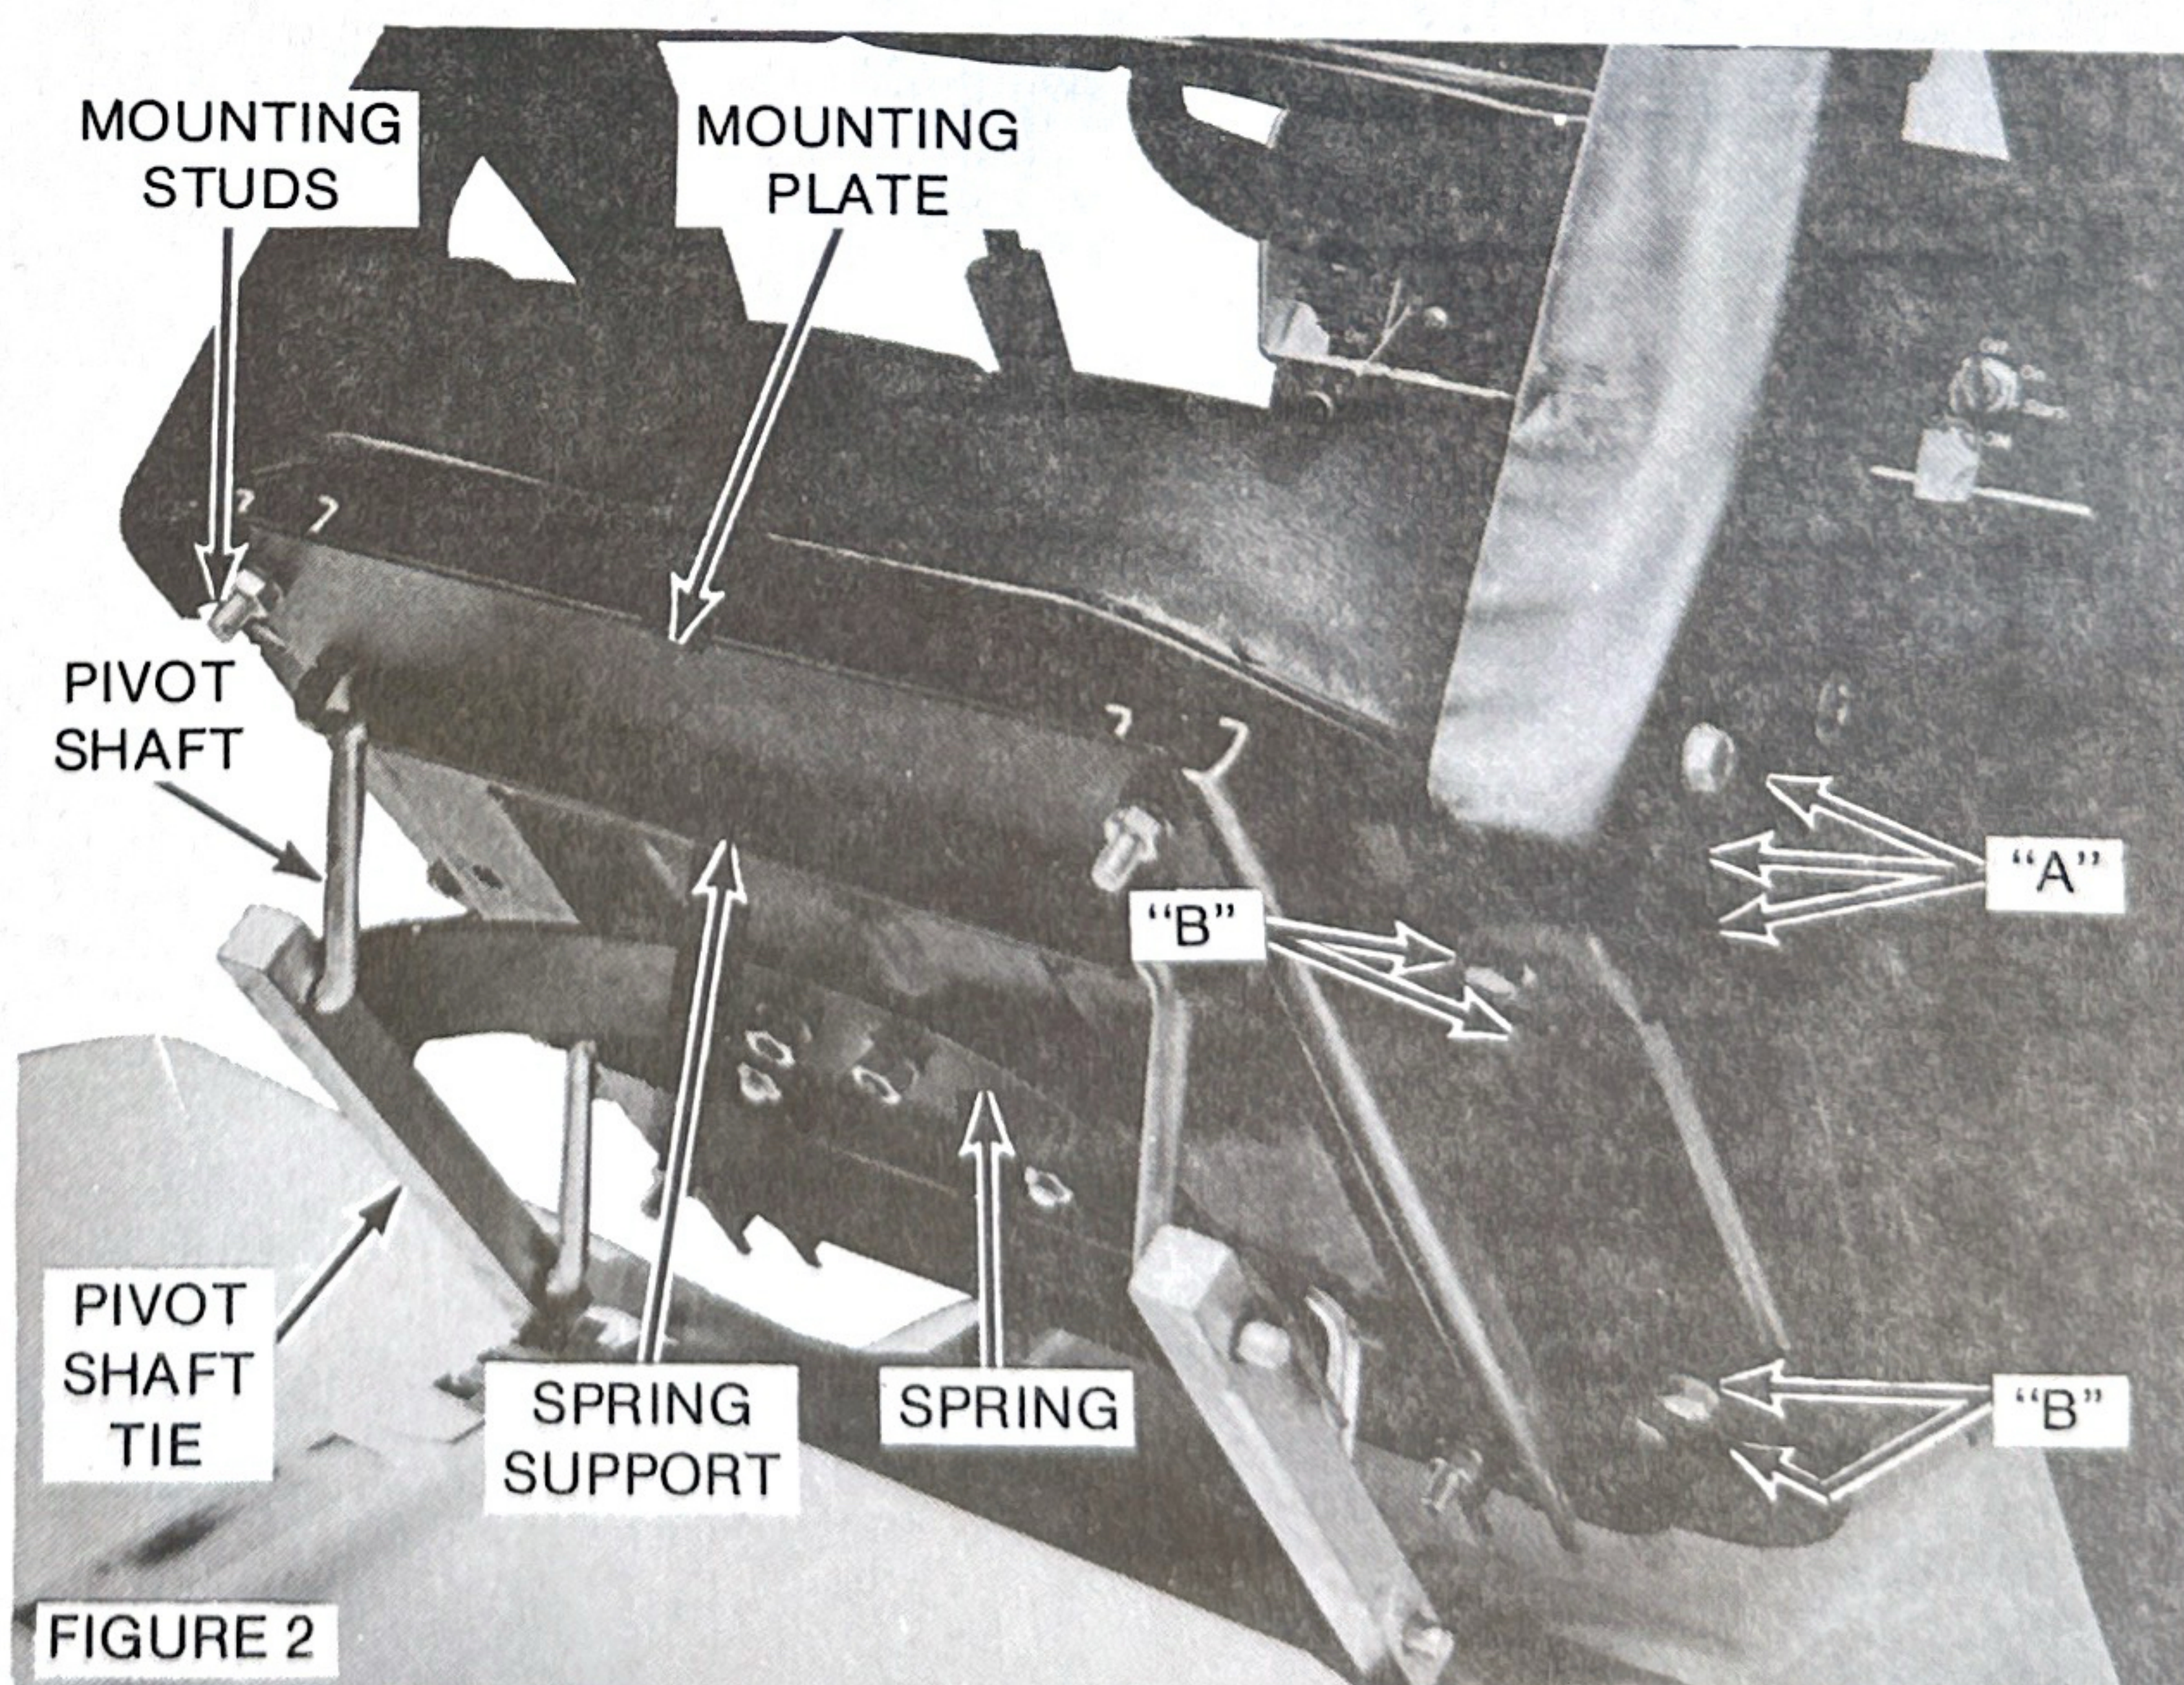


FIGURE 2

The back rest can be adjusted to four different heights, see "B" figure 1. Remove capscrews securing back to frame. Reposition the back as desired and secure with capscrews removed above.

The back rest can be tilted into three different positions, see "B" figure 2. Remove the capscrews on each side of frame. Tilt the back to the position desired and secure with the capscrews removed above.

The seat cushion has two positions in the frame, see "B" figure 2. Remove the four capscrews securing cushion to the frame. Reposition cushion over the second set of holes and secure with capscrews removed above.

Besides the above adjustments the seat is adjustable with a slide rail mount plus the three mounting slots in the fender. See figure 1.

This Kit consists of:

- 1 — #172-7959 Deluxe Seat
- 1 — #172-7958 Plate
- 2 — #110-0046 Hex Capscrew
3/8-16 x 1
- 2 — #110-0243 Lockwasher
3/8
- 2 — #118-6231 Hex Nut
3/8-16
- 4 — #110-0242 Lockwasher
5/16
- 4 — #118-6230 Hex Nut
5/16-18

