
Assembly Instructions

fmc ORBIT-AIR


BAG ADAPTER KIT

MODEL 6835

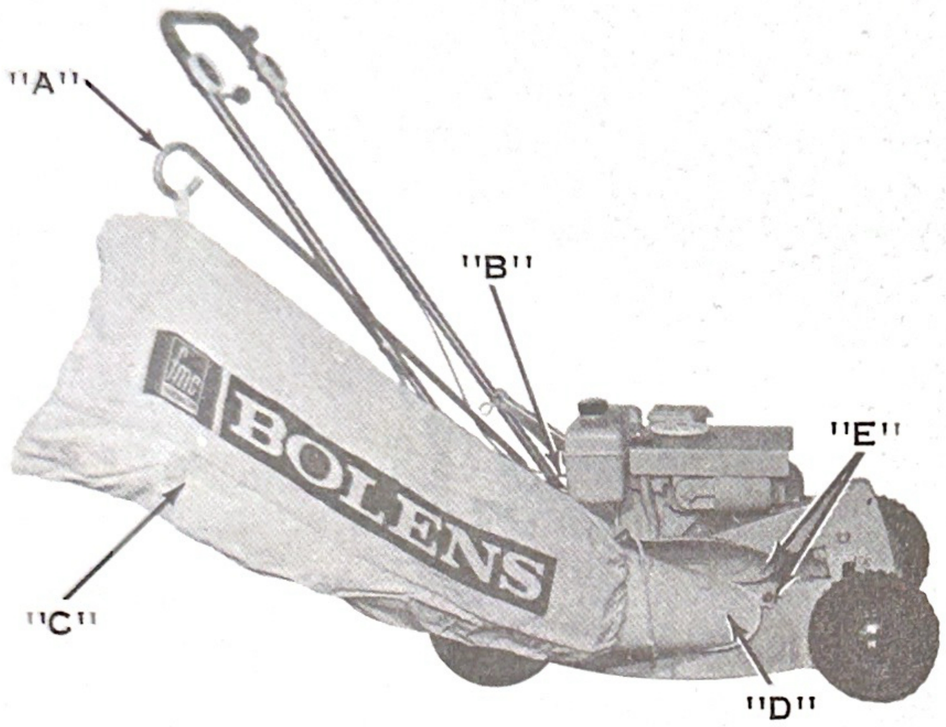

WITH GRASS CATCHING BAG

Figure 1

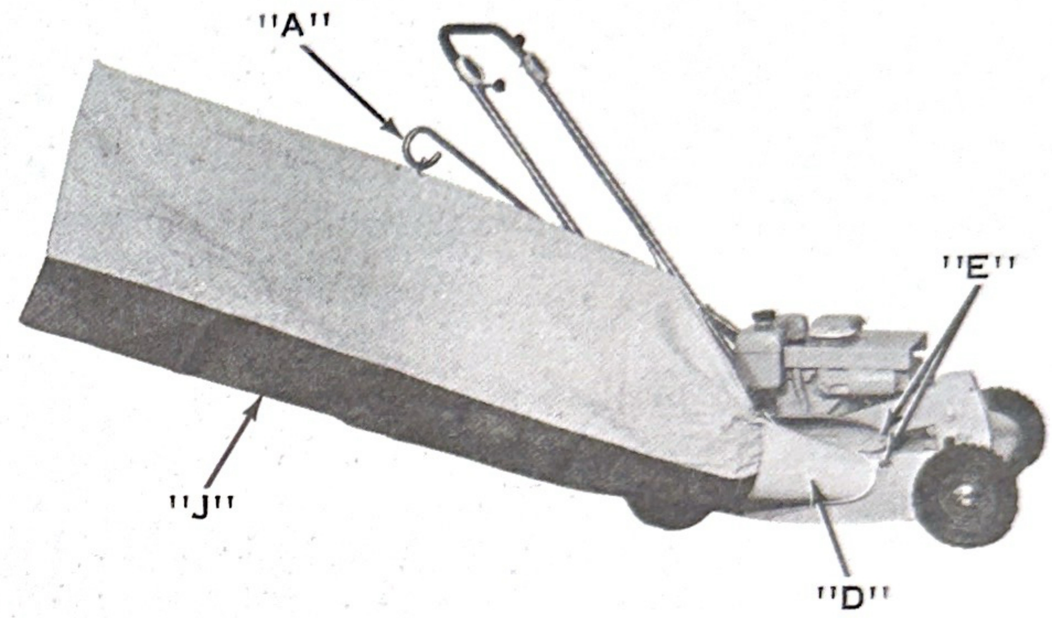

WITH LEAF CATCHING BAG

Figure 2

TO THE OWNER

This is an operation and general maintenance manual only and does not cover major repair. All major repair work must be performed by an authorized BOLENS DEALER or the factory warranty is void. Bolens equipment is carefully engineered to give good performance if properly operated and maintained. Keep your equipment clean and lubricate it as prescribed in this manual. Periodically inspect your unit and perform any upkeep maintenance necessary.

Your dealer is obligated by the factory to completely assemble and service new equipment prior to first delivery, and thoroughly explain and demonstrate its operation. He will repair or replace any parts which fail due to defective material and/or workmanship during the warranty period, and also provide future repair service and supply genuine factory repair parts.

IN EVENT OF ANY PROBLEM OR PARTS REQUIRED ALWAYS CONTACT YOUR DEALER. DO NOT RETURN PARTS TO THE FACTORY. WE REQUIRE PRIOR FACTORY APPROVAL ON RETURNS, AND APPROVALS ARE ISSUED ONLY TO BOLENS DEALERS OR DISTRIBUTORS.

GENERAL SAFETY PRECAUTIONS

Preventing accidents is the responsibility of every equipment operator. The following general safety precautions must be carefully understood and followed by every operator of this unit. Review them frequently and NEVER TAKE CHANCES. BE CAREFUL BEFORE, DURING AND RIGHT AFTER USE OF ANY POWERED EQUIPMENT. ACCIDENTS CAN BE PREVENTED.

1. Never attempt to install or remove discharge chute with mower running. Injury from moving parts could result.

2. Always shut off engine when removing and reinstalling discharge bag to prevent injury from moving parts.

3. Always keep hands and feet free from edge of mower base when engine is running. Injury from revolving blade could result.

4. Never cut grass with discharge chute attached and bag removed. Ejected debris can cause injury.

5. Always keep your unit clean and in good repair. It will operate more efficiently and safer.

fmc CORPORATION ® BOLENS ®

PORT WASHINGTON, WISCONSIN, U.S.A.

FORM NO. 552265 Printed in U.S.A. 2/71

6. Always wear shoes when operating mower to give your feet as much protection as possible.

7. Refer to your Mower Owner Manual for additional Safety Precautions.

8. Do not leave mower unattended with engine running at any time with bag removed. Revolving blade will result in injuries by carelessly cleaning debris out of plastic chute.

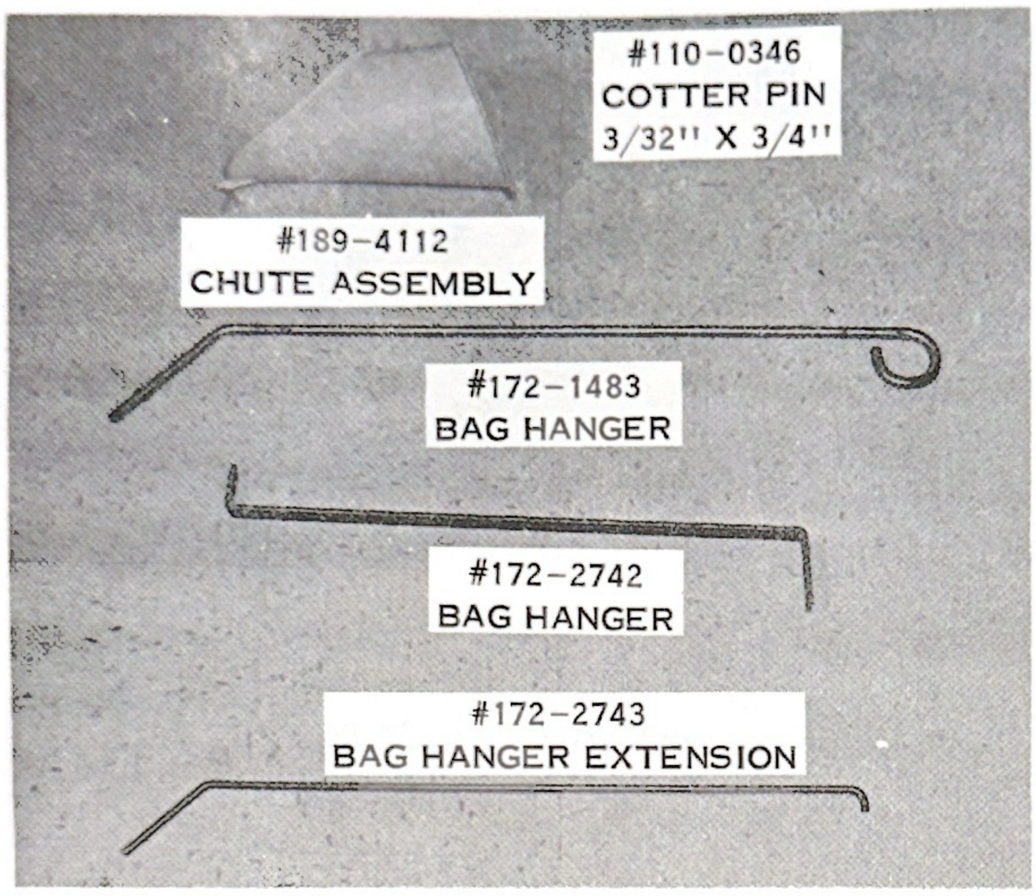


Figure 3

ASSEMBLY

To properly assemble this attachment:

1. Insert straight end of bag support rod "A" into "B" on top of mower deck, with the end with the hook passing just forward of the Right Hand handle and extending to the Right Rear. Make sure lugs on rod engage the slots in socket "B."

2. Release lock pin (E) on discharge door. Lift special latch, on top of discharge door, to allow door to open fully. Position chute (D) over discharge opening with the lip on rear of chute behind wall of mower base. Insert lock pin (E) into mower base and turn 90° to lock.

3. To use the grass catching bag, attach bag (C) to discharge chute (D) and hook loop on opposite end of bag over rod (A).

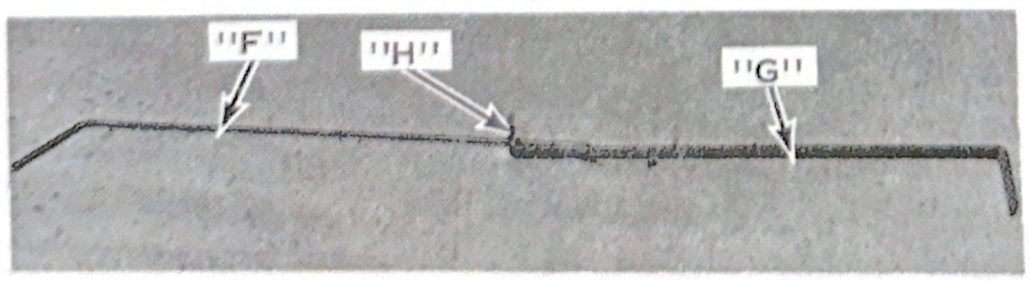


Figure 4

4. To use the leaf catcher bag assemble bag hanger extension "F" into bag hanger "G" by installing hook end through holes "H" and secure with cotter pin.

5. Install bag hanger into bag with the flat portio towards closed end and loop up through hole in top of bag.

6. Attach bag "J" to discharge chute "D" and hook loop of bag hanger onto large hook of rod "A."

IMPORTANT: AFTER REMOVING BAG ATTACHMENT CONTINUE MOWING WITH THE DISCHARGE DOOR CLOSED.

IMPORTANT: IT IS GOOD PRACTICE TO ALWAYS HANG UP BAGS AFTER USE TO ALLOW BAG TO THOROUGHLY DRY AND AIR OUT, ESPECIALLY AFTER CUTTING LUSH SPRING OR WET GRASSES.

NOTE

UNDER NORMAL USAGE THE BAG MATERIAL IS SUBJECT TO DETERIORATION AND WEAR AND SHOULD THEREFORE BE FREQUENTLY CHECKED FOR BAG REPLACEMENT.

A REPLACEMENT BAG SHOULD BE CHECKED TO INSURE COMPLIANCE WITH THE ORIGINAL MANUFACTURER'S RECOMMENDATIONS OR SPECIFICATIONS.

Bolens reserves the right to change specifications, add improvements or discontinue the manufacture of any of its equipment without notice or obligation to purchasers of its equipment.

Bolens approval of the use of attachments manufactured by other manufacturers is limited to assurance that such use will not void Bolens warranty on the Bolens equipment to which the outside manufactured attachments are adapted. The responsibility for the design, performance, durability, safety in operation, service repair availability, and warranty obligation remain with the outside manufacturer. Bolens specifically excludes from its warranty obligation all such outside manufactured attachments.

Bolens warranty will be voided if unapproved attachments are adapted to use with Bolens equipment and are so used.